

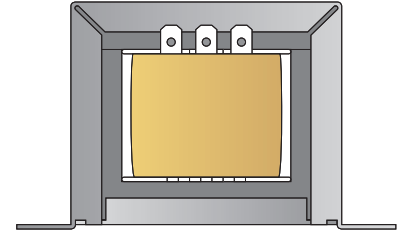
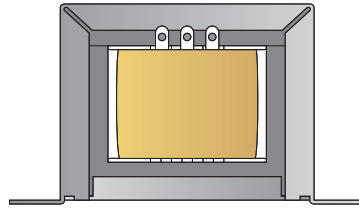


CES CENTER-TAPPED POWER TRANSFORMERS

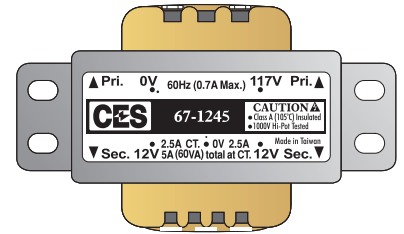

117 VAC primary voltage,
secondary voltages 12, 24,
and 48 volt with center tap.

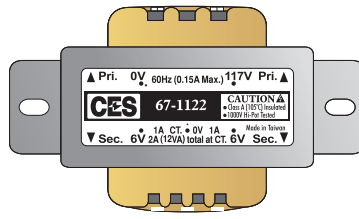


Primary Input Voltage 117vac
Output Voltage 12VCT and 24VCT
Solder Lug/Push-on Terminals
Class A Rated @ 105°C Insulated
1,000 Volt Hi-Pot Tested

SPECIFICATIONS

Part Number	Rated Output Voltage*	Rating A	Rating B	Frame Size	Mounting Hole Center to Center	Overall Thickness/Width (Inches) (Excluding Mounting Tabs)	Height
67-1120	12VAC	250ma	500ma	EI-41x14.5	2.07"	1.29 x 1.69	1.41"
67-1121	12VAC	.5 amp	1 amp	EI-41x16.5	2.07"	1.37 x 1.69	1.41"
67-1122	12VAC	1 amp	2 amp	EI-48x20B	2.36"	1.57 x 1.96	1.67"
67-1123	12VAC	1.5 amp	3 amp	EI-57x19A	2.79"	1.73 x 2.32	2.0"
67-1124	12VAC	2 amp	4 amp	EI-57x25B	2.79"	1.95 x 2.32	2.0"
67-1125	12VAC	2.5 amp	5 amp	EI-66x25B	3.14"	2.12 x 2.67	2.28"
67-1240	24VAC	250ma	500ma	EI-41x16.5	2.07"	1.37 x 1.69	1.41"
67-1241	24VAC	.5 amp	1 amp	EI-48x20B	2.36"	1.57 x 1.96	1.67"
67-1242	24VAC	1 amp	2 amp	EI-57x25B	2.79"	1.95 x 2.32	2.0"
67-1243	24VAC	1.5 amp	3 amp	EI-66x30	3.14"	2.29 x 2.67	2.28"
67-1244	24VAC	2 amp	4 amp	EI-76x30	3.62"	2.42 x 3.1	2.65"
67-1245	24VAC	2.5 amp	5 amp	EI-76x35A	3.62" x 2 rows in 0.72" pitch	2.64 x 3.1	2.65"

SOLDERABLE PERF BOARDS

Copper clad mounting holes with 0.1" matrix. Fits most standard components. Mating project enclosures available.

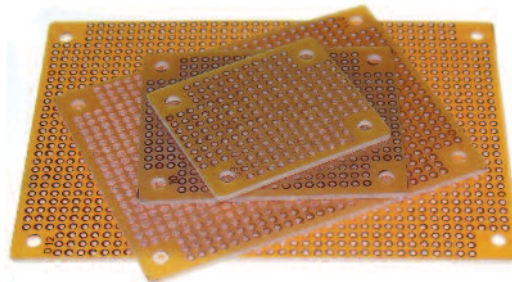

PART #	DIMENSIONS
64-8931	1-1/2" x 1-3/4"
64-8932	1-7/8" x 2-1/4"
64-8933	2-1/2" x 3-1/8"
64-8934	3" x 4-1/4"