

## HARDWARE TERMINALS

**QUICK DISCONNECT** Vinyl insulated female disconnects, .250"; 100/pack



PART #	COLOR	AWG
100	(Red)	22-18 g.
101B	(Blue)	16-14 g.
102Y	(Yellow)	12-10 g.

**QUICK DISCONNECT** Vinyl fully insulated female disconnects, .250"; 100/pack



PART #	COLOR	AWG
103A	(Red)	22-18 g.
103B	(Blue)	16-14 g.

**QUICK DISCONNECT** Nylon see thru fully insulated female disconnects, .250"; 100/pack



PART #	COLOR	AWG
103C	(Red)	22-18 g.
103D	(Blue)	16-14 g.
103E	(Yellow)	12-10 g.

**QUICK DISCONNECT** Vinyl insulated .250" male disconnects; 100/pack



PART #	COLOR	AWG
400	(Red)	22-18 g.
401	(Blue)	16-14 g.
402	(Yellow)	12-10 g.

**QUICK DISCONNECT** Nylon fully insulated male disconnect .250"; 100/pack




PART #	COLOR	AWG
403	(Red)	22-18 g.
404	(Blue)	16-14 g.
405	(Yellow)	12-10 g.

**QUICK DISCONNECT** Vinyl insulated female disconnects, .187"; 100/pack



PART #	COLOR	AWG
105A	(Red)	22-18 g.
105B	(Blue)	16-14 g.

**QUICK DISCONNECT** Vinyl insulated female disconnects, .205"; 100/pack



PART #	COLOR	AWG
105C	(Red)	22-18 g.
105D	(Blue)	16-14 g.

**QUICK DISCONNECT** Vinyl insulated female disconnects, .110"; 100/pack




PART #	COLOR	AWG
104A	(Red)	22-18 g.

**QUICK DISCONNECT** Male "Y" disconnect, .250". Fully insulated.



PART #	COLOR	AWG
800Y	(Blue)	-

**QUICK DISCONNECT** See-thru male disconnect strip, .250". Fully insulated. 24 per strip.



PART #	COLOR	DESC
800	(Yellow)	12 /side.

**FLEXIBLE TERMINAL STRIPS** Vinyl insulated female disconnects, .250"



PART #	DESCRIPTION
64-8029	Flexible PVC screw terminal strip. Easily bent in any direction. 12 double rows. Cut to desired number of poles.

### MALE BULLET CONNECTORS

Vinyl insulated male bullets, .156"; 100/pack



PART #	COLOR	AWG
300M	(Red)	22-18 g.
301M	(Blue)	16-14 g.

### MALE BULLET CONNECTORS

See-thru nylon insulated male bullets, .156"; 100/pack



PART #	COLOR	AWG
300MN	(Red)	22-18 g.
301MN	(Blue)	16-14 g.

### FEMALE BULLET CONNECTORS

Vinyl insulated female bullets, .156"; 100/pack



PART #	COLOR	AWG
300F	(Red)	22-18 g.
301F	(Blue)	16-14 g.

### FEMALE BULLET CONNECTORS


See-thru nylon insulated female bullets, .156"; 100/pack



PART #	COLOR	AWG
300FN	(Red)	22-18 g.
301FN	(Blue)	16-14 g.

### RING TERMINALS

Vinyl insulated rings, #6 inside diameter. 100/pack



PART #	COLOR	AWG
106	(Red)	22-18 g.
106C	(Blue)	16-14 g.

### RING TERMINALS

Vinyl insulated rings, #8 inside diameter. 100/pack



PART #	COLOR	AWG
106A	(Red)	22-18 g.
107A	(Blue)	16-14 g.
108A	(Yellow)	12-10 g.

### RING TERMINALS

Vinyl insulated rings, #10 inside diameter. 100/pack



PART #	COLOR	AWG
106B	(Red)	22-18 g.
107C	(Blue)	16-14 g.
108C	(Yellow)	12-10 g.

### RING TERMINALS

Vinyl insulated rings, 1/4" inside diameter.



PART #	COLOR	AWG
107B	(Blue)	16-14 g.
108B	(Yellow)	12-10 g.

### RING TERMINALS

Vinyl insulated rings, 3/8" inside diameter.



PART #	COLOR	AWG
108D	(Blue)	16-14 g.
109	(Yellow)	12-10 g.
109A	(Red)	8 g.

### RING TERMINALS

Vinyl insulated ring, 1/2" inside diameter.



PART #	COLOR	AWG
110A	(Yellow)	12-10 g.

## HARDWARE TERMINALS

### PIGGY BACK ADAPTORS

Female to male piggyback adapters, .250"; 100/pack



PART #	COLOR	AWG
119A	(Red)	22-18 g.
119B	(Blue)	16-14 g.

### QUICK SPLICE ADAPTORS

Vinyl fold-and-snap line splicers; 100/pack



PART #	COLOR	AWG
600	(Red)	22-18 g.
601	(Blue)	16-14 g.

### BUTT CONNECTORS

Vinyl insulated butt connectors; 100/pack



PART #	COLOR	AWG
200	(Red)	22-18 g.
201	(Blue)	16-14 g.
202	(Yellow)	12-10 g.
208	(Red)	8 g.

### FEMALE BULLET CONNECTORS

See-thru nylon insulated butt connectors; 100/pack



PART #	COLOR	AWG
203	(Red)	22-18 g.
204	(Blue)	16-14 g.
205	(Yellow)	12-10 g.

### SPADE TERMINALS


Vinyl insulated spade tongues #6 inside diameter. 100/pack



PART #	COLOR	AWG
503	(Red)	22-18 g.
505	(Blue)	16-14 g.

### SPADE TERMINALS

Vinyl insulated spade tongues #8 inside diam.; 100/pack



PART #	COLOR	AWG
500	(Red)	22-18 g.
501	(Blue)	16-14 g.
502	(Yellow)	12-10 g.

### SPADE TERMINALS


Vinyl insulated spade tongues #10 inside diam.; 100/pack



PART #	COLOR	AWG
504	(Red)	22-18 g.
506	(Blue)	16-14 g.
507	(Yellow)	12-10 g.

### WIRE NUTS


Vinyl wire nuts, threaded on the inside. 100/pack



PART #	COLOR	AWG
113A	(Yellow)	22-18 g.
114A	(Tan)	16-14 g.

### CRIMP CAPS

Nylon crimp caps, regular barrel. 100/pack



PART #	COLOR	AWG
111A	(Natural)	22-14 g.
112A	(Natural)	12-10 g.

## HEAT SHRINK PERMA-SEAL TERMINALS

Perma-Seal all-weather heat 1 sealable terminals and splices provide a rugged, environmentally sealed connection for wire sizes 8-22 AWG that will insulate, seal, and protect wire splices from physical abuse and abrasion, water, salt, and other corrosive compounds.

### INSULATED HEAT SHRINK BUTT SPLICES


Perma-Seal™ nylon splices. Seals and protects when heat activated; 25/pack



PART #	COLOR	AWG
19164-0013	(Red)	18-22 g.
19164-0044	(Blue)	14-16 g.
19164-0056	(Yellow)	10-12 g.
19164-0079	(Red)	8 g.

### INSULATED HEAT SHRINK QUICK DISCONNECTS

Perma-Seal™ nylon female quick disconnect couplers. Seals and protects when heat activated. .250" tab size; 25/pack

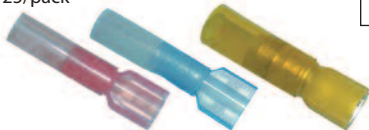

PART #	COLOR	AWG
19164-0017	(Red)	18-22 g.
19164-0050	(Blue)	14-16 g.
19164-0076	(Yellow)	10-12 g.

### INSULATED HEAT SHRINK RING TERMINALS

Perma-Seal™ nylon ring terminals. Seals and protects when heat activated; 25/pack



PART #	COLOR	ID	AWG
19164-0086	(Red)	#8 ID	18-22 g.
19164-0033	(Blue)	#8 ID	14-16 g.
19164-0026	(Blue)	1/4" ID	14-16 g.
19164-0020	(Blue)	3/8" ID	14-16 g.
19164-0062	(Yellow)	#8 ID	10-12 g.
19164-0066	(Yellow)	1/4" ID	10-12 g.
19164-0068	(Yellow)	3/8" ID	10-12 g.
19164-0082	(Red)	3/8" ID	8 g.

### INSULATED HEAT SHRINK SPADE TERMINALS

Perma-Seal™ nylon spade terminals. Seals and protects when heat activated; 25/pack



PART #	COLOR	AWG
19164-0007	(Red)	18-22 g.
19164-0029	(Blue)	14-16 g.
19164-0070	(Yellow)	10-12 g.

## 3M HARDWARE TERMINALS

### T-TAP QUICK SPLICE ADAPTERS

Nylon female T-taps, Accepts .250" male disconnect; 100/pack



PART #	COLOR	AWG
3M604	(Red)	22-18 g.
3M605	(Blue)	16-14 g.
3M606	(Yellow)	12-10 g.

### SCOTCHLOK® ADAPTERS

Fully insulated line splicers and adapters; 100/pack



PART #	COLOR	AWG
3M801	(Blue)	14-18/14-18 g.
3M905	(Red)	18-22/14-18 g.
3M902	(Brown)	14-18/10-12 g.
3M901	(Black)	14-18 g.*
Splice-on ATC blade fuse holder.		
3M972A	(Blue)	14-18 g.

\* Accepts bullet connector.

## COPPER RING TERMINALS

### COPPER RING TERMINALS

High grade, heavy-duty, seamless bare copper terminals. Made from ETP (Electrolyte Tough Pitch) copper.



\* 5/16" I.D. terminals fit battery and starter connector screws exactly.

PART #	ID
#8 gauge diameter	
AET-8141	1/4" I.D.
AET-8561*	5/16" I.D.
AET-8382	3/8" I.D.
AET-8503	1/2" I.D.
#6 gauge diameter	
AET-6141	1/4" I.D.
AET-6561*	5/16" I.D.
AET-6382	3/8" I.D.
AET-6503	1/2" I.D.
#4 gauge diameter	
AET-4141	1/4" I.D.
AET-4561*	5/16" I.D.
AET-4382	3/8" I.D.
AET-4503	1/2" I.D.

### COPPER BUTT CONNECTORS

High grade, heavy-duty, seamless tinned copper butt connectors. Made from ETP (Electrolyte Tough Pitch) copper.




PART #	AWG
AET-20001	8 g.
AET-10001	6 g.
AET-1001	4 g.

## SCREW TERMINALS

### OCTAL SOCKET SCREW TERMINALS

8 & 11 pin screw terminals for easy connections and changes. Can be surface mounted or used with aluminum DIN rail. UL listed.

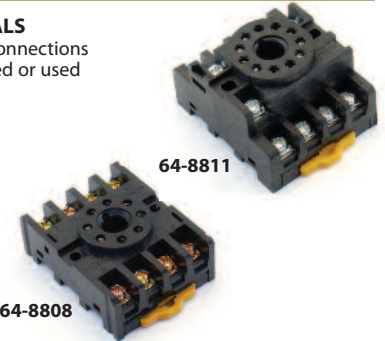

PART #	PINS
64-8811	11
64-8808	8

## RELAYS, RELAY SOCKETS & DOOR LOCK ACTUATOR

### PROLINK® SPDT RELAY

The ProLink SPDT40P features a higher current capability than the venerable industry standard Bosch relay.




PART #	DESCRIPTION	N.O. 12V	N.C. 12V
SPDT40P	PLASTIC MOUNTING TAB & HOUSING	40 AMP	30 AMP
SPDT40M	METAL BRACKET/PLASTIC HOUSING	40 AMP	30 AMP

### 2-WIRE POWER DOOR LOCK ACTUATORS

2-wire hook-up actuator. Compatible with most model vehicles and capable of tripping all model door locks. Mounting hardware included.



### PRE-WIRED DUAL RELAY SOCKETS

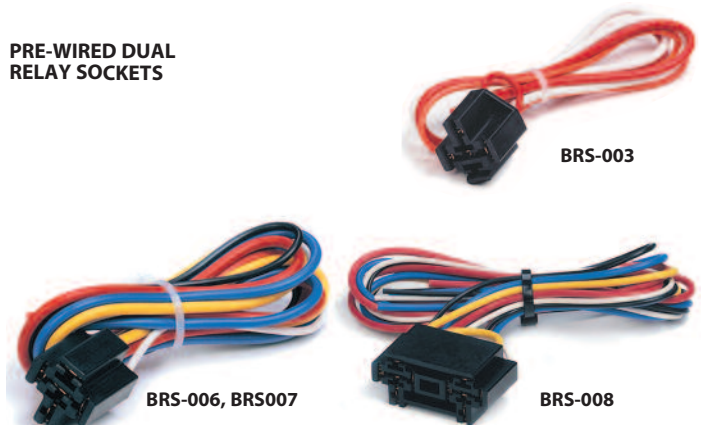

PART #	DESCRIPTION	LEADS
BRS-003	WITH DIODE (2) 12 AWG. AND (2) 18 AWG. WIRES	12"
BRS-006	(3) 14 AWG. AND (2) 18 AWG. WIRES	12"
BRS-007	(3) 14 AWG. AND (2) 18 AWG. WIRES	17"
BRS-008	(6) 14 AWG. AND (4) 18 AWG. WIRES	24"