

Part Number DR

Header DR Diesel Resistant Elastomer Heat Shrink Tubing

Description Thermosleeve-USA DR is a flexible cross-linked Elastomer heat shrink tubing that provides long-term resistance against diesel, hydraulic fluids and chemicals. Manufactured from a cross-linked elastomeric material, DR heat shrink has been specially formulated to offer both cut and abrasion resistant properties. Ten sizes cover the diameter range from 1/8" (3.2mm) to 3" (76.2mm) and DR has a minimum shrink temperature rating of 175 degrees C (347 degrees F).


Agency Approval & Compliance ROHS, SAE, MIL, Flame Retardant, REACH, VW1

Application DR heat shrink tubing is well suited for protecting wire harnesses and cables where resistance to oil, diesel, hydraulic fluids and chemicals is essential. Common utilization includes transportation and military applications.

Shrink Ratio and Operating Temperature DR has a 2:1 shrink ratio. When fully recovered, the 2:1 material will shrink to fifty percent (50%) of its original supplied diameter.

DR has a continuous operating temperature rating of -75 degrees C (-103 degrees F) and 150 degrees C (302 degrees F)

Standard Sizes and Dimension

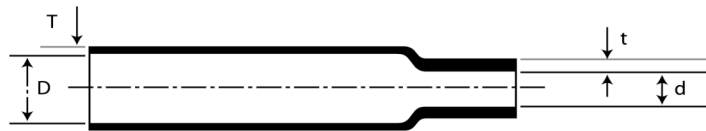

Sizes

Size (Inch)	As Supplied	After Recovery		Standard Packing
	Min ID mm (D)	Max ID mm (d)	Wall-thickness mm (t)	
1/8	3.20	1.60	0.75±0.15	50m
3/16	4.80	2.4	0.82±0.15	50m
1/4	6.40	3.2	0.90±0.15	50m
3/8	9.50	4.75	1.02±0.20	50m
1/2	12.7	6.35	1.22±0.20	30m
3/4	19.1	9.55	1.45±0.28	30m
1	25.4	12.7	1.78±0.28	30m
1-1/2	38.1	19.0	2.41±0.41	30m
2	50.8	25.1	2.79±0.41	1m

Specifications

Item	Specifications	
Shrink Temperature (°C)	175	
Operating Temperature Range (°C)	-65~150	
Tensile Strength (Mpa)	≥11.7	
Elongation at Break (%)	≥250	
Longitudinal Change	<10	
Aging in Circulation-air oven	150°C, 168hrs	
After Aging	Tensile Strength (Mpa)	≥10.3
	Elongation at Break (%)	≥200
Volume Resistance (Ω.cm)	1.0×10 ¹¹	
Dielectric strength	≥11.9	
Water Absorption	≤ 2	
Elongation after Fluid Resistance	≥175	
After Aging	Tensile Strength (Mpa)	≥10.4
	Elongation at Break (%)	≥200
	Dielectric strength	≥7.9

Availability Four-foot lengths, master reels and cut pieces

Important Notice The information related to Thermosleeve-USA products both in printed or electronic format is believed to be reliable but the accuracy and completeness is not guaranteed. We suggest that before using this product, you evaluate and determine if it is suitable to your intended application. Thermosleeve-USA assumes no risk or liability associated with the use of this material. Any statements related to this product that are not contained in the current Thermosleeve-USA online or printed literature, or any contrary statements referenced on purchase order, shall have no force or effect unless expressly agreed to in writing and signed by an office of Thermosleeve-USA.

Limited Warranty/Limited Liability Thermosleeve-USA offers no guarantees in respect to the accuracy of the information detailed in this document and accepts no explicit or applied liability as to the products use. In no instance will Thermosleeve-USA be liable for any eventual, indirect or consequential damage or damages arising from the sale, resale, transfer, use or misuse of the product. Thermosleeve-USA specifications are subject to change without notice; including changes in materials and processing that do not affect compliance of the products specification. Thermosleeve-USA guarantees the product to be free from defects in material and manufacturing at the time of purchase. If this product is found to be defective within the warranty period, at our option we will refund the purchase price, replace or repair the Thermosleeve-USA product.